
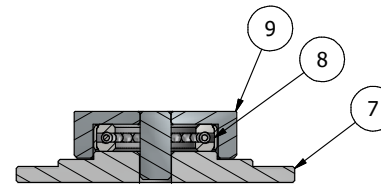
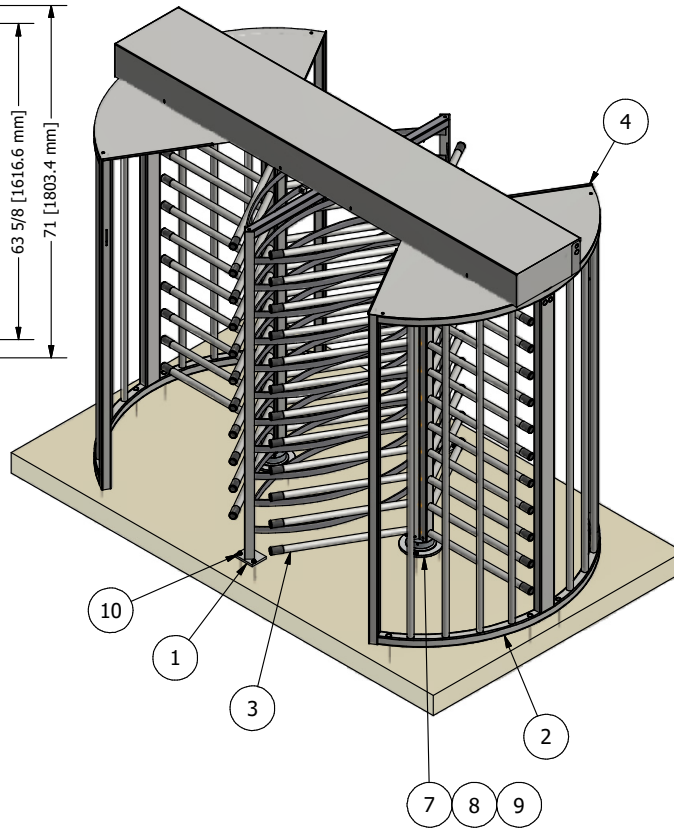


POWER &
ACCESS CONTROL
CONNECTION
(INTERNAL)

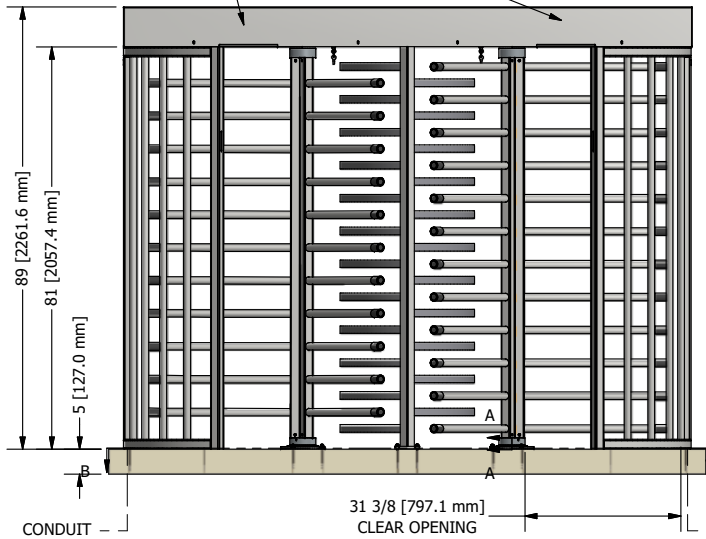

SECTION A-A
SCALE 1 / 4

GENERAL NOTES:

TURNLOCK-100TC(114) = 1 DIRECTION ELECTRICALLY CONTROLLED.
TURNLOCK-100TC2(114) = 2 DIRECTIONS ELECTRICALLY CONTROLLED.
TURNLOCK-100MTC(114) = MECHANICAL UNIT.

GALVANIZED CARBON STEEL CONSTRUCTION.

MINIMUM PAD SIZE SHOWN. MUST BE LEVEL WITHIN 1/4".

ALLOW 1" [25.4MM] FOR REMOVAL OF LIFT-OFF COVER.

ELECTRICAL NOTES:

POWER SERVICE OPTIONS:

1. 24 VDC
2. 110 VAC SINGLE PHASE
3. 220 VAC SINGLE PHASE 50/60HZ
4. 220 VAC DUAL PHASE 50/60HZ

15A MAINS SERVICE REQ'D

4 LOCATIONS AVAILABLE FOR CONDUIT ACCESS.

AUTHORIZATION, FIRE ALARM REQUIRES DRY CONTACT FROM ACCESS CONTROL.

CODED NOTES:

1. BARRIER ASSEMBLY, WELDED - GALVANIZED STEEL
2. SHIELD ASSEMBLY, WELDED (2) - GALVANIZED STEEL
3. ROTOR ASSEMBLY, WELDED (6) - GALVANIZED STEEL
4. CEILING PLATE (2) - GALVANIZED STEEL
5. MECHANISM CHANNEL- POWDERED COATED STEEL
6. 2PC CHANNEL COVER - STAINLESS STEEL
7. BASE PLATE - ANODIZED ALUMINUM
8. BOTTOM BEARING
9. BOTTOM FLANGE
10. ANCHOR BOLTS (18), PROVIDED

