

## **TURNLOCK 100.**

## THE ROBUST, EXTERIOR SECURITY GATE

A heavy-duty, full-height turnstile, the Turnlock 100 is ideal for outside applications where perimeter security is vital. Constructed entirely of high quality, 18-gauge metal, this turnstile is capable of surviving the harshest weather and traffic conditions with minimal maintenance. The rugged construction ensures low maintenance and dependable operation for many years – making it an excellent investment for the long-term.



## **OVERVIEW**

For any outdoor location that requires a full-height security solution to mitigate tailgating and handle moderate throughput, the Turnlock 100 is the one for the job. Traffic flow is two-way, but one direction at a time. Users must stop and wait their turn before proceeding through the turnstile. With a choice between three or four wings, this security solution also provides flexibility with regards to capacity, user comfort and all-around premises security.

## ALL-WEATHER UNMANNED PERIMETER SECURITY

This low level security entrance solution is available with straight or curved arms and is available in a tandem version, giving you the benefits of two single turnstiles in one space-saving package. Constructed of stainless steel material, the Turnlock 100 is the ideal turnstile for year-round weather and suitable for all outdoor climates, without compromising any safety or security features.

## INCREASE SECURITY WITH ACCESS CONTROL

The Turnlock 100 has the option of a universal access control panel known as BoonTouch. This feature allows remote operation and management of the secure entry point from a reception or security desk at the push of a bottom. This user-friendly interface allows each entry to be operated individually or simultaneously – as the situation demands and shows any security breach instantly. The control panel can operate any combination of up to 6 security access solutions and is compatible with most of the solutions in our product range.

#### **KEY FEATURES**

- Premium materials and heavy-duty construction
- Smooth rotation
- Easy installation and field-configurable
- Mechanical or electrical operation
- Tandem installation for double passage
- Extended arm model for disabled access
- Easily integrates with almost any access control system
- External control panel
- Additional flexible options available to fine-tune or 'Level Up'

#### **KEY BENEFITS**

- Capable of operating under abusive conditions
- Minimal maintenance
- Low energy consumption
- Quiet operation
- Easy to re-configure in the field

## SUGGESTED SEGMENTS

- Manufacturing
- Industrial
- Education
- Transit terminals
- Leisure / recreation

#### SCALABLE FLEXIBILITY IS THE FUTURE

The ability to integrate a large variety of secondary security technology into our full height turnstiles is the ideal way in which to fine-tune by 'Leveling Up' their entrance security when increased protection is required.

Meeting your security goal easily and within your budget is the reason why we work together with you to ensure that by using these options, you end up with a product that outperforms the others safely, beautifully and profitably.



## PUTTING THE POWER BACK IN YOUR HANDS

One size does not fit all, and that is why we at Boon Edam believe in offering modular solutions. This approach allows the security professional to design a tailored entrance solution that balances security and safety with aesthetics.

The result is a unique entrance that fits the needs of each industry, application and individual company. To get started, choose from an array of quality standard options. Then, 'Level Up' where it matters most to your company – whether that be in terms of throughput, security, safety, aesthetics, technology or user comfort – or a combination of each. A modular solution approach truly puts the power back into your hands - the power to create a refined entry with ease.

## You can level up in any of these categories:



## LEVEL UP

If our standard specifications do not quite suit your needs, we open up opportunities for you to 'Level Up' where it counts most. You can also do this according to your most motivating value driver:

The specification table shows you our standard product options, and to the right of these, you can easily see, and consider, any compatible 'Level Up' options for finetuning the Turnlock 100.










#### TECHNICAL SPECIFICATIONS


	THROUGHPUT	STANDARD	LEVEL UP OPTIONS
	Throughput	15-20 People per minute	Tandem: 2x 15-20 people per minute
	Diameter	1524 mm	Tandem: 2441 mm
	Top Channel Height	203 mm	Tandem: 203 mm
	Overall Height	2260 mm	Tandem: 2262 mm
	Passage Width	648 mm	4-Wing model: 504.9 mm Tandem: 2x 625 mm
	Number of Segments	3	4
	Flow	Bi-directional, one direction at a time	Uni-directional, one-way only
	SECURITY	STANDARD	LEVEL UP OPTIONS
	Access Control Integration	Dry contacts for virtually any access control device	
	Key Switch Panel	Manual key override (entry, exit or both) for remote locking/unlocking of turnstile	Electric key override
$(\mathbb{U})$	SAFETY	STANDARD	LEVEL UP OPTIONS
	Fail Safe Operation	Lock and motor both disengage in the event of a power failure	Fail secure: lock and motor remained locked in the event of a power failure
	Fire Alarm Connection	Emergency egress settings depending on local regulations and or customer request	
	Heel Protectors		Eliminates heel contact during passage
(00)			
$(\bigcirc)$	AESTHETICS	STANDARD	LEVEL UP OPTIONS
	AESTHETICS  Frame Material	STANDARD  Galvanized steel	LEVEL UP OPTIONS  Powder coated, anodized aluminium, stainless steel
			Powder coated, anodized aluminium,
	Frame Material	Galvanized steel	Powder coated, anodized aluminium, stainless steel Powder coated, anodized aluminium,
	Frame Material  Curved Wall Material	Galvanized steel	Powder coated, anodized aluminium, stainless steel Powder coated, anodized aluminium, stainless steel, transparent polycarbonate Extruded covers create a seamless center
	Frame Material  Curved Wall Material  Finished Rotor Covers	Galvanized steel Galvanized steel	Powder coated, anodized aluminium, stainless steel Powder coated, anodized aluminium, stainless steel, transparent polycarbonate Extruded covers create a seamless center rotor shaft LEVEL UP OPTIONS INTEGRATION OPPORTUNITIES:
	Frame Material  Curved Wall Material  Finished Rotor Covers  TECHNOLOGY	Galvanized steel  Galvanized steel  STANDARD	Powder coated, anodized aluminium, stainless steel Powder coated, anodized aluminium, stainless steel, transparent polycarbonate Extruded covers create a seamless center rotor shaft LEVEL UP OPTIONS
	Frame Material  Curved Wall Material  Finished Rotor Covers  TECHNOLOGY  Power Supply	Galvanized steel  Galvanized steel  STANDARD  110-220 VAC, 50 / 60 Hz	Powder coated, anodized aluminium, stainless steel Powder coated, anodized aluminium, stainless steel, transparent polycarbonate Extruded covers create a seamless center rotor shaft LEVEL UP OPTIONS INTEGRATION OPPORTUNITIES: • BoonTouch external control panel
	Frame Material  Curved Wall Material  Finished Rotor Covers  TECHNOLOGY  Power Supply  Operating Power	Galvanized steel  Galvanized steel  STANDARD  110-220 VAC, 50 / 60 Hz  60W	Powder coated, anodized aluminium, stainless steel Powder coated, anodized aluminium, stainless steel, transparent polycarbonate Extruded covers create a seamless center rotor shaft LEVEL UP OPTIONS INTEGRATION OPPORTUNITIES: • BoonTouch external control panel
	Frame Material  Curved Wall Material  Finished Rotor Covers  TECHNOLOGY  Power Supply  Operating Power  Operating Temperature	Galvanized steel  Galvanized steel  STANDARD  110-220 VAC, 50 / 60 Hz  60W  -15°C to +45°C	Powder coated, anodized aluminium, stainless steel Powder coated, anodized aluminium, stainless steel, transparent polycarbonate Extruded covers create a seamless center rotor shaft  LEVEL UP OPTIONS  INTEGRATION OPPORTUNITIES:  • BoonTouch external control panel (up to 6 lanes)
	Frame Material  Curved Wall Material  Finished Rotor Covers  TECHNOLOGY  Power Supply  Operating Power  Operating Temperature  Weight	Galvanized steel  Galvanized steel  STANDARD  110-220 VAC, 50 / 60 Hz  60W  -15°C to +45°C  360 kg  Enclosure is IP56 rated to protect electrical	Powder coated, anodized aluminium, stainless steel Powder coated, anodized aluminium, stainless steel, transparent polycarbonate Extruded covers create a seamless center rotor shaft  LEVEL UP OPTIONS  INTEGRATION OPPORTUNITIES:  • BoonTouch external control panel (up to 6 lanes)
	Frame Material  Curved Wall Material  Finished Rotor Covers  TECHNOLOGY  Power Supply  Operating Power  Operating Temperature  Weight  Top Channel Protection	Galvanized steel  Galvanized steel  STANDARD  110-220 VAC, 50 / 60 Hz  60W  -15°C to +45°C  360 kg  Enclosure is IP56 rated to protect electrical	Powder coated, anodized aluminium, stainless steel Powder coated, anodized aluminium, stainless steel, transparent polycarbonate Extruded covers create a seamless center rotor shaft  LEVEL UP OPTIONS  INTEGRATION OPPORTUNITIES:  BoonTouch external control panel (up to 6 lanes)  Tandem: 640 kg
	Frame Material  Curved Wall Material  Finished Rotor Covers  TECHNOLOGY  Power Supply  Operating Power  Operating Temperature  Weight  Top Channel Protection  Card Reader Mount	Galvanized steel  Galvanized steel  STANDARD  110-220 VAC, 50 / 60 Hz  60W  -15°C to +45°C  360 kg  Enclosure is IP56 rated to protect electrical	Powder coated, anodized aluminium, stainless steel Powder coated, anodized aluminium, stainless steel, transparent polycarbonate Extruded covers create a seamless center rotor shaft  LEVEL UP OPTIONS  INTEGRATION OPPORTUNITIES:  BoonTouch external control panel (up to 6 lanes)  Tandem: 640 kg  Mounting box on end post  Extends life for 4 hours after power loss  LEVEL UP OPTIONS
	Frame Material  Curved Wall Material  Finished Rotor Covers  TECHNOLOGY  Power Supply  Operating Power  Operating Temperature  Weight  Top Channel Protection  Card Reader Mount  Battery Backup	Galvanized steel  Galvanized steel  STANDARD  110-220 VAC, 50 / 60 Hz  60W  -15°C to +45°C  360 kg  Enclosure is IP56 rated to protect electrical components from outside elements	Powder coated, anodized aluminium, stainless steel Powder coated, anodized aluminium, stainless steel, transparent polycarbonate Extruded covers create a seamless center rotor shaft  LEVEL UP OPTIONS  INTEGRATION OPPORTUNITIES:  BoonTouch external control panel (up to 6 lanes)  Tandem: 640 kg  Mounting box on end post  Extends life for 4 hours after power loss

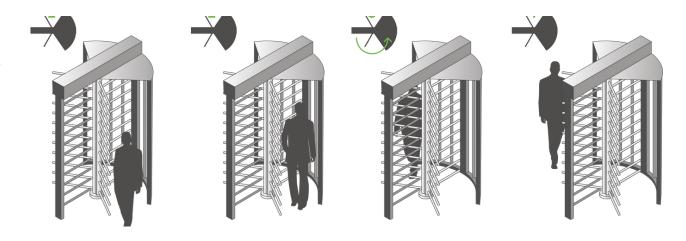

## TECHNICAL DIMENSIONS









## SERVICE AND MAINTENANCE

With hundreds or thousands of visitors passing through an entry every day, continued and reliable operation is vital. Regular service and maintenance can prevent unexpected hardware breakdowns. Boon Edam's service and maintenance teams across the world are experienced in the effects the local conditions have on the wear and tear of your entry solutions and can offer specialised service and maintenance contracts that correspond to those conditions perfectly.

## **COMPLIANCE**

The goal of an organisation is to safeguard the valuable assets inside – both people and property. As is often the case, industries must comply with relevant local and global laws, policies and regulations, to achieve the important goal of overall safety and security. Failure to meet the appropriate measures and criteria set out in these regulations could result in catastrophic incidents and substantial fines.

Boon Edam security entrances are trusted solutions that allow organisations to meet compliance regulations related to restricting access to areas within a building. We take compliance and safety very seriously and ensure that our products are manufactured, installed and maintained to keep up the strict criteria required in all our countries. We are always improving and always committed to making sure our products are compliant and certified. More information can be found on our website under 'About Us'.

## The Turnlock 100 complies with the following American standard:

- UL standard 294
- CAN/ULC standard S319



# OUR REACH IS GLOBAL.

We have been in business for more than 140 years manufacturing premium aesthetic and security entrance solutions in the Netherlands, United States of America and China. We can confidently say that we cover every corner of the globe with subsidiary companies in major cities across the globe. Furthermore our global export division not only partner with our distributors, but also offer direct sales and service to every territory. This wide net allows us to have a strong global footprint as well as a personal grasp of local markets and their unique entry requirements.

To find your closest Boon Edam expert, please go to:

www.boonedam.com/contact



