



BOON EDAM
YOUR **ENTRY** EXPERTS.

THE NORTHCLIFFE























DATA SHEET

CIRCLESIDE.



THE **CURVED SLIDING** DOOR

DIMENSIONS AND SPECIFICATIONS

Based on standard glazing and aluminium powder coat finish.

A					B	C	D	E
Diameter (mm)	# of Door Wings	Disabled Access	Type of Traffic	Emergency Exit	Installation Width (mm)	Throat Opening (mm)	Height Under Canopy (mm)	Canopy Height (mm)
1800	2x2			✓	1877	1029	2200-3000	300-600
2000	2x2			✓	2077	1172	2200-3000	300-600
2200	2x2			✓	2277	1314	2200-3000	300-600
2400	2x2			✓	2477	1457	2200-3000	300-600
2600	2x2			✓	2677	1599	2200-3000	300-600
2800	2x2			✓	2877	1741	2200-3000	300-600
3000	2x2			✓	3077	1883	2200-3000	300-600
3200	2x2			✓	3277	1343	2200-3000	300-600
3400	2x2			✓	3477	1443	2200-3000	300-600
3600	2x2			✓	3677	1543	2200-3000	300-600
3800	2x2			✓	3877	1643	2200-3000	300-600

Doors outside these dimensions are available on request, please consult your Boon Edam representative for more information.

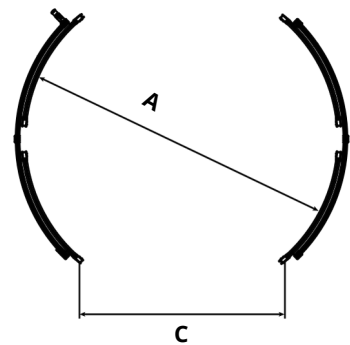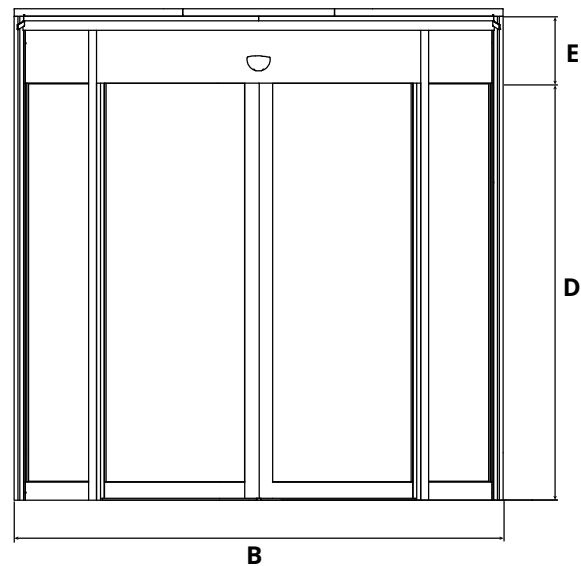

TECHNICAL SPECIFICATIONS

Power Supply: 200-240 VAC, 50/60 Hz

Power Consumption

Operating: 50W

Stationary: 30W

Ambient Temperature: -20°C to +50°C

Fuse: External power supply fused with 10A slow

LEVEL UP OPTIONS

- Air curtain
- Interlocking mode
- Floor mats
- Connection to external alarm systems (e.g. fire alarm)
- Authorised night entry
- Push-button free out

NIGHT LOCKING OPTIONS

- Key impulse switch - The Circleslide is fitted with an electromechanical lock
- Direction sensitive motion detectors in order to lock the door. It can be unlocked with a key
- Glass protection sheets or by means of an optional key impulse switch.

EMERGENCY EGRESS

The Circleslide can be used as an escape route in case of emergency. Both door sets are equipped with an emergency power supply to maintain normal operation in case of a power failure. If the door has been connected to for example a fire alarm, the door sets will open automatically to create a barrier-free passage. (Escape route requirements are subject to local regulations).

OUR REACH IS GLOBAL.

We have been in business for 150 years, manufacturing premium aesthetic and security entrance solutions in The Netherlands, the United States of America and China. We can confidently say that we cover every corner of the globe with subsidiary companies in major cities across the globe. Furthermore our global export division not only partner with our distributors, but also offer direct sales and service to every territory. This wide net allows us to have a strong global footprint and a personal grasp of local markets and their unique entry requirements.

To find your closest Boon Edam expert, please go to:
www.boonedam.co.uk/contact



Boon Edam Limited
T +44 (0) 1233 505 900
E uk.contact@boonedam.com
I www.boonedam.co.uk

V3-1224


BOON EDAM
YOUR **ENTRY** EXPERTS.