







DATA SHEET



TOURLOCK 180.

THE **HIGH SECURITY** REVOLVING DOOR

DIMENSIONS AND SPECIFICATIONS

A			Disabled Access	Type of Traffic	Emergency Exit	B	C	D	E
Diameter (mm)	Capacity / Minute	# of Door Wings				Installation Width (mm)	Throat Opening (mm)	Height Under Canopy (mm)	Canopy Height (mm)
1600	2x 20	4	X		X	1677	1038	2100-2600	200-600
1800	2x 20	4	X		X	1877	1180	2100-2600	200-600
2000	2x 20	4	X		X	2077	1321	2100-2600	200-600
2200	2x 20	4	X		X	2277	1463	2100-2600	200-600

Doors outside these dimensions are available on request, please consult your Boon Edam representative for more information.

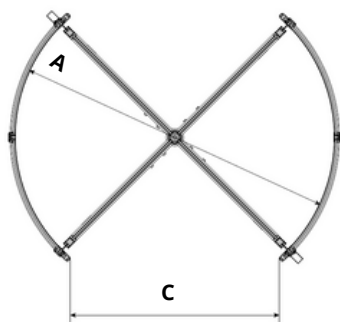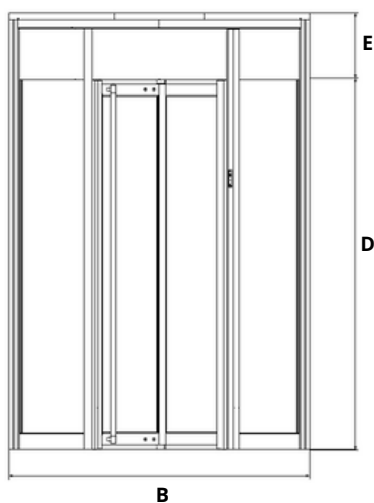

EMERGENCY EGRESS

The Tourlock 180 is delivered in fail-safe mode as standard, disengaging the lock and motor in the event of a power failure or emergency situation. If required, the door can also be made fail-secure, ensuring no one can access a secured area if there is a power failure or if the fire alarm is activated. Fail secure operation maintains security in the event of an emergency and can be offered with or without manual unlocking. The Tourlock 180 can also be specified with a collapsible door set that can be utilised in the event of an emergency where free passage is required.

TECHNICAL SPECIFICATIONS

Power Supply: 200-240 VAC, 50/60 Hz

Motor: AC motor, 3-phase

Power Consumption

Operating: 205W

Stationary: 200W

Ambient Temperature: -20°C to +50°C

Fuse: External power supply fused with 16A slow

SECURITY OPTIONS

- StereoVision technology for highly accurate tailgating and piggybacking detection
- Weight system (floor) for detecting tailgating and piggybacking
- Sensor system (ceiling) for effective tailgating detection

LEVEL UP OPTIONS

- Card reader mounting options
- External control panel
- Matwell trim for mounting on the floor or surface-mounted
- Feedback signals to the authorisation system
- Night-locking doors with standard laminated vandalism or burglar-resistant glass.
- Bullet-resistant (BR2NS / BR4NS) glass (only available on automatic Tourlocks)

All Boon Edam products easily integrate with third-party access control systems.

OUR REACH IS GLOBAL.

We have been in business for over 150 years manufacturing premium aesthetic and security entrance solutions in the Netherlands, United States of America and China. We can confidently say that we cover every corner of the globe with subsidiary companies in major cities across the globe. Furthermore our global export division not only partner with our distributors, but also offer direct sales and service to every territory. This wide net allows us to have a strong global footprint as well as a personal grasp of local markets and their unique entry requirements.

To find your nearest Boon Edam expert, please go to:
www.boonedam.co.uk/contact



Boon Edam Limited
T +44 (0) 1233 505 900
E uk.contact@boonedam.com
I www.boonedam.co.uk

V5-1224


BOON EDAM
YOUR **ENTRY** EXPERTS.