

COLLAPSIBLE ARM IN
POWER FAIL OR
EMERGENCY POSITION

GENERAL NOTES:

LEFT-HAND OR RIGHT HAND
ONE DIRECTION ELECTRICALLY CONTROLLED
TWO DIRECTIONS ELECTRICALLY CONTROLLED

OPTIONAL PLATFORM AND RAILING AVAILABLE.
OPTIONAL POWDERCOATING AVAILABLE

ELECTRICAL NOTES:

POWER SERVICE OPTIONS:

1. 24 VDC
2. 110 VAC SINGLE PHASE
3. 220 VAC SINGLE PHASE 50/60HZ
4. 220 VAC DUAL PHASE 50/60HZ


15A MAINS SERVICE REQ'D

AUTHORIZATION, FIRE ALARM REQUIRES DRY CONTACT FROM
ACCESS CONTROL.

CODED NOTES:

1. COVER - STAINLESS STEEL.
2. CABINET - STAINLESS STEEL.
3. REVEAL - STAINLESS STEEL.
4. ARM - STAINLESS STEEL Ø1-1/4" 16GA. (3) TYP.
5. ACCESS DOORS (2) TYP.
6. HUB - POWDERCOATED ALUMINUM.

PASSAGE WIDTH & ARM LENGTH		
PASSAGE WIDTH	ARM LENGTH	TRUE ARM LENGTH
20.5"	18"	18.53"
22"	19.25"	19.54"

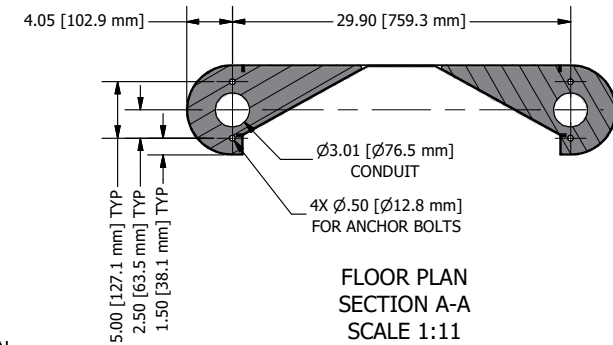

FLOOR PLAN
SECTION A-A
SCALE 1:11