


BOON EDAM


402 McKinney Parkway Lillington, NC 27546 United States of America T +1 (910) 814-3800 E sales@boonedam.us https://www.boonedam.us

Reference Drawings Updated 8/21/19

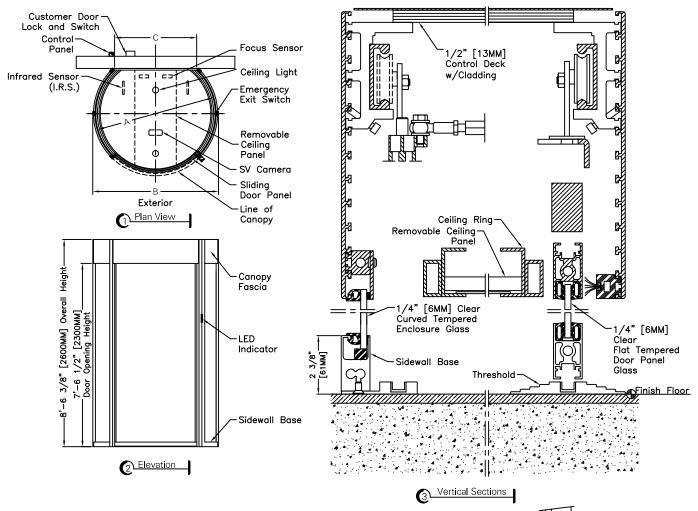

## Standard Door Sizes

Nominal	Inside Diameter	Outside Net Frame	Throat Opening
Diameter	"A"	<b>"</b> B"	"C"
5'-0"	4'-11 1/8" [1500MM]	5'-2" [1575MM]	3'-4 5/8" [1030MM]



## Options:

StereoVision (Anti-piggybacking): StereoVision requires 7'-6 5/8" [2300mm] door opening height with a 8'-6 3/8" [2600mm] overall height

- -StereoVision on entrance (1-way SV)
- -StereoVision on entrance/exit (2-way SV)

## Installation:

Door installed on finished in floor.

Power supply from above.

Door ties to adjacent storefront or curtain-wall system for lateral stability.

Adjacent construction not to bear down on any part of door.

