

#### GENERAL NOTES:

TRILOCK-60 AVAILABLE AS:

- MECHANICAL UNIT
- ONE DIRECTION ELECTRICALLY CONTROLLED
- TWO DIRECTIONS ELECTRICALLY CONTROLLED

OPTIONAL POWDERCOATING AVAILABLE.

#### ELECTRICAL NOTES:

POWER SERVICE OPTIONS:

1. 110 VAC SINGLE PHASE
2. 220 VAC SINGLE PHASE 50/60HZ




15A MAINS SERVICE REQ'D

AUTHORIZATION, FIRE ALARM REQUIRES DRY CONTACT FROM ACCESS CONTROL.

#### CODED NOTES:

1. TOP COVER - STAINLESS STEEL
2. CABINET - STAINLESS STEEL
3. ACCESS DOOR - STAINLESS STEEL
4. ARM - STAINLESS STEEL Ø1-1/4" 16GA. (3) TYP
5. COVER LOCK
6. HUB - CLEAR ANODIZED ALUMINUM
7. CONCEALED HINGES

PASSAGE WIDTH & ARM LENGTH		
PASSAGE WIDTH	TRUE ARM LENGTH	ARM LENGTH FROM CABINET
20"	19"	18.30

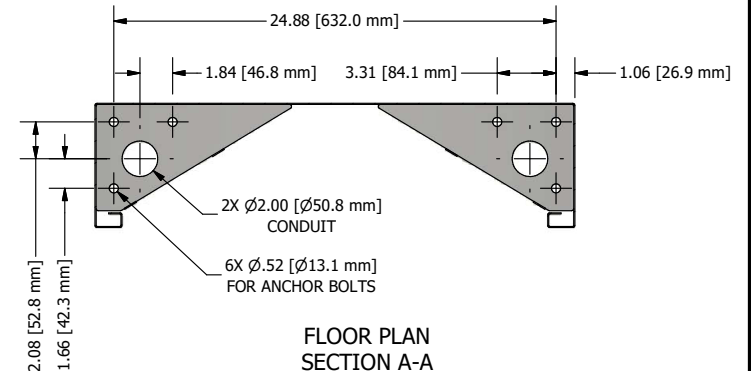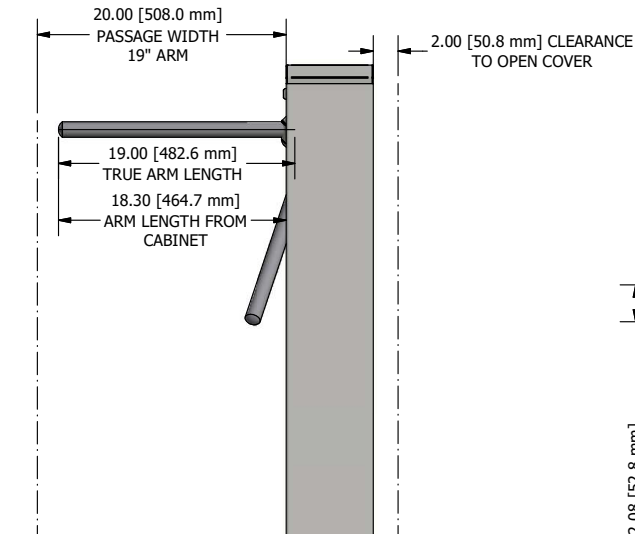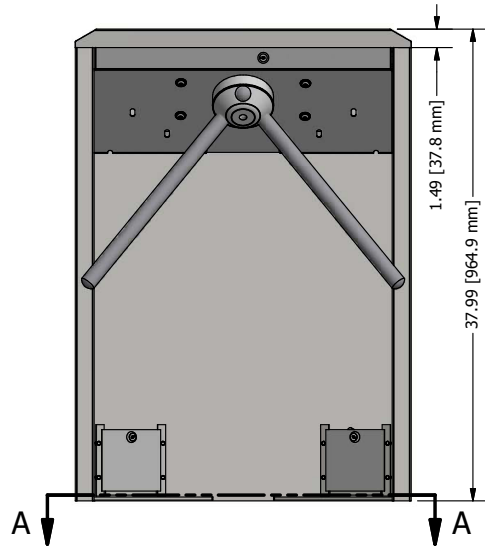

FLOOR PLAN  
SECTION A-A  
SCALE 1:7

TRILOCK-60: STAINLESS STEEL WAIST HIGH TURNSTILE #:

Project: PRODUCT CUTSHEET  
Job #: Contractor:  
Rev: 9/9/2025 By: TH Architect:

Page: 1 of 1  
Scale:

**BOON EDAM**  
402 McKinney PKWY, Lillington, NC 27546 - (910) 814-3800 © BOON EDAM