

GENERAL NOTES:

TRILOCK-75:

- MECHANICAL UNIT
- ONE DIRECTIONS ELECTRICALLY CONTROLLED
- TWO DIRECTIONS ELECTRICALLY CONTROLLED

OPTIONAL POWDERCOATING AVAILABLE

ELECTRICAL NOTES:

POWER SERVICE OPTIONS:

1. 110 VAC SINGLE PHASE
2. 220 VAC SINGLE PHASE 50/60HZ




15 MAINS SERVICE REQ'D

AUTHORIZATION, FIRE ALARM REQUIRES DRY CONTACT FROM ACCESS CONTROL

CODED NOTES:

1. TOP COVER - STAINLESS STEEL
2. CABINET - STAINLESS STEEL
3. ACCESS DOORS (2) TYP.
4. ARM - STAINLESS STEEL Ø1-1/4" 16GA. (3) TYP
5. COVER LOCK
6. HUB - CLEAR ANODIZED ALUMINUM
7. CONCEALED HINGE

PASSAGE WIDTH & ARM LENGTH		
PASSAGE WIDTH	TRUE ARM LENGTH	ARM LENGTH FROM CABINET
20"	19	17.61

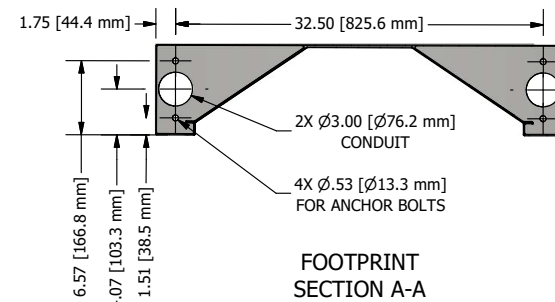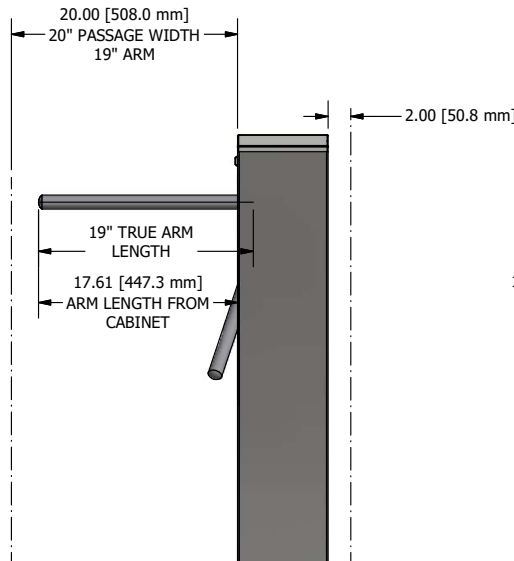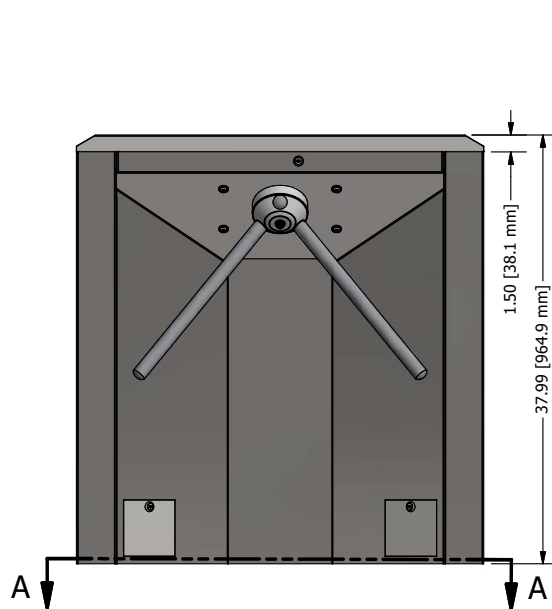

FOOTPRINT
SECTION A-A
SCALE 1:11