

GENERAL NOTES:

- TRILOCK-75CA:
- ONE DIRECTION ELECTRICALLY CONTROLLED
 - TWO DIRECTIONS ELECTRICALLY CONTROLLED

OPTIONAL POWDERCOATING AVAILABLE

ELECTRICAL NOTES:

- POWER SERVICE OPTIONS:
1. 110 VAC SINGLE PHASE
 2. 220 VAC SINGLE PHASE 50/60HZ


15 MAINS SERVICE REQ'D

AUTHORIZATION, FIRE ALARM REQUIRES DRY CONTACT FROM ACCESS CONTROL

CODED NOTES:

1. TOP COVER - STAINLESS STEEL
2. CABINET - STAINLESS STEEL
3. ACCESS DOORS (2) TYP.
4. ARM - STAINLESS STEEL Ø1-1/4" 16GA. (3) TYP.
5. COVER LOCK
6. HUB - CLEAR ANODIZED ALUMINUM.
7. CONCEALED HINGE

PASSAGE WIDTH & ARM LENGTH		
PASSAGE WIDTH	TRUE ARM LENGTH	ARM LENGTH FROM CABINET
22"	19	19.44"

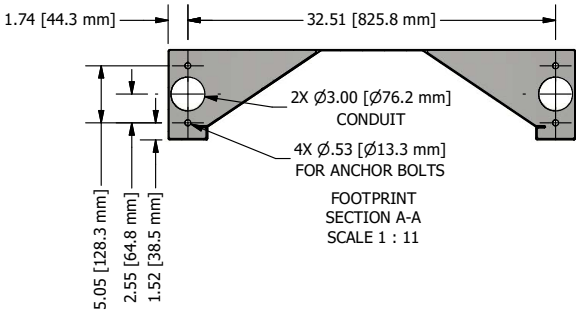

COLLAPSIBLE ARM IN
POWER FAIL OR
EMERGENCY POSITION